

FRESHPOINT® F2000-B2B

TWO STAGE FILTRATION SYSTEM



APPLICATIONS

- ◆ Drinking water

FEATURES • BENEFITS

- ◆ Certified to reduce up to 99.7% of Total PFAS*
- ◆ Effortless click-in cartridge change-outs
- ◆ Color-coded cartridges maintain proper filter sequence
- ◆ 3/8" push fittings for easy installation

INSTALLATION TIPS

- ◆ Choose a mounting location suitable to support the full weight of the system when operating.
- ◆ Install vertically with the cartridge hanging down.
- ◆ System may be installed with cartridge flush to the baseboard if desired as the mechanical assist lever pushes cartridges straight out.
- ◆ Magnetic timer may be removed from system and placed in alternative locations such as on refrigerator.

OPERATION TIPS


- ◆ Replace cartridge every 675 gallons or 1 year (or if flow has diminished).
- ◆ Place replacement cartridges in proper sequence utilizing color coded shapes.
- ◆ System designed with integrated check valves so cold water line does not need to be shut-off to perform cartridge change-outs.

INCLUDES

- ◆ Side faucet
- ◆ Installation kit
- ◆ Installation and operation manual

*The test mixture for total PFAS is made up of PFOA (500 ppt), PFOS (1,000 ppt), PFHxS (300 ppt), PFNA (50 ppt), PFHpA (40 ppt), PFBS (260 ppt), and PFDA (10 ppt). This system meets the 20 ppt requirement for Total PFAS.

FRESHPOINT F2000-B2B TWO STAGE FILTRATION SYSTEM

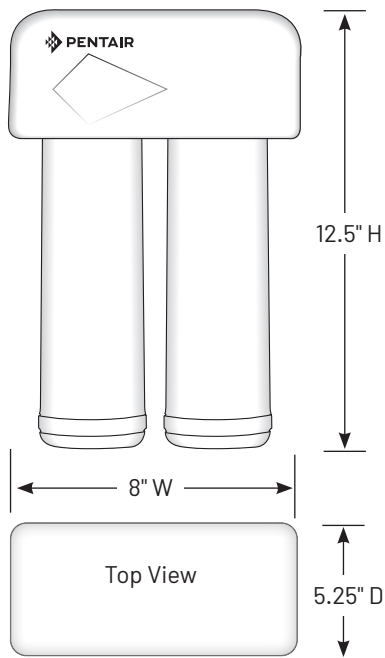

SPECIFICATIONS

- ◆ **System (Model/Part No.)**
F2000-B2B/158839
- ◆ **Inlet Size**
3/8" QC
- ◆ **System Dimensions**
12.5" H x 8" W x 5.25" D
(317 mm x 203 mm x 133 mm)
- ◆ **System Weight**
4.50 lbs (2.04 kg)
- ◆ **Contaminant Reduction**
Chlorine Taste & Odor
Lead
Atrazine
Nominal Particulate Class I
Total PFAS,
Cyst: NSF/ANSI Standard 53
certified to reduce cysts such
as *Cryptosporidium* and *Giardia* by
mechanical means.
Microplastics
- ◆ **Micron Rating**
0.50
- ◆ **Approximate Filter Life***
Up to 1 Year
- ◆ **Capacity**
675 Gallons (2555 Liters)
- ◆ **System Production Rate**
0.60 gpm (2.27 Lpm)
(Side Faucet Required)
- ◆ **Certifications**
NSF/ANSI Standard 42, 53, 401
CSA Standard B483.1
- ◆ **Feed Pressure Range**
40 - 100 psi (2.75 - 6.89 bar)
- ◆ **Temperature Range**
40 - 100°F (4.4 - 37.8°C)
- ◆ **Replacement Cartridges**
(Model/Part No.)
F2B2-RC2/655126-96 (Twin Pack)

*Filter life dependent on gallon usage and overall incoming water quality.

EPA Est. No. 082989-CHN-001



The model F2000-B2B is Tested and Certified by NSF International against NSF/ANSI Standards 42, 53, 401 and CSA B483.1 for the reduction of substances specified in the service manual or at www.nsf.org.



The model F2000-B2B is certified by IAPMO R&T to NSF/ANSI 53 for the reduction of Total PFAS.†

†The test mixture for Total PFAS is made up of PFOA (500 ppt), PFOS (1,000 ppt), PFHxS (300 ppt), PFNA (50 ppt), PFHpA (40 ppt), PFBS (260 ppt), and PFDA (10 ppt). This system meets the 20 ppt requirement for Total PFAS.



Pentair Residential Filtration

13845 Bishops Dr. | Suite 200 | Brookfield, WI 53005 | United States

P: 262.238.4400 | Customer Service: 800.279.9404 | tech-support@pentair.com | pentair.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2026 Pentair. All Rights Reserved.

4006658 AP26