

FLOPLUS PROTECT 20BB

PFAS FILTRATION SYSTEM



APPLICATION

- ◆ Whole Home

FEATURES • BENEFITS

- ◆ Professional grade PFAS reduction system for the whole home
- ◆ System is certified to reduce five PFAS compounds, commonly known as “forever chemicals” up to 99.82%
- ◆ Proprietary Fibredyne™ technology provides high-flow rate with low pressure drop
- ◆ 40,000 gallon capacity at 5 gpm flow rate for PFAS
- ◆ Integrated pressure relief valve for easier cartridge change-outs
- ◆ Complete system with cartridge, wrench, mounting bracket kit and manual
- ◆ High Chlorine Reduction

INSTALLATION TIPS

- ◆ Choose a mounting location suitable to support the full weight of the system when operating.
- ◆ Make sure to properly lubricate O-ring prior to use.
- ◆ Install vertically with bowl hanging down.
- ◆ Allow 2-1/2" (6.35 cm) clearance below the cartridge for easy cartridge replacement.

OPERATION TIPS

- ◆ Replace cartridge if flow rate decreases.
- ◆ Inspect O-ring during each cartridge change. Lubricate and/or replace if necessary.


SIZING

- ◆ Service Flow Rate: 5 gpm

INCLUDES

- ◆ 20" filter housing
- ◆ 20" filter cartridge
- ◆ Wrench
- ◆ Mounting bracket with screws
- ◆ Installation and operation manual

FLOPLUS PROTECT 20BB PFAS FILTRATION SYSTEM

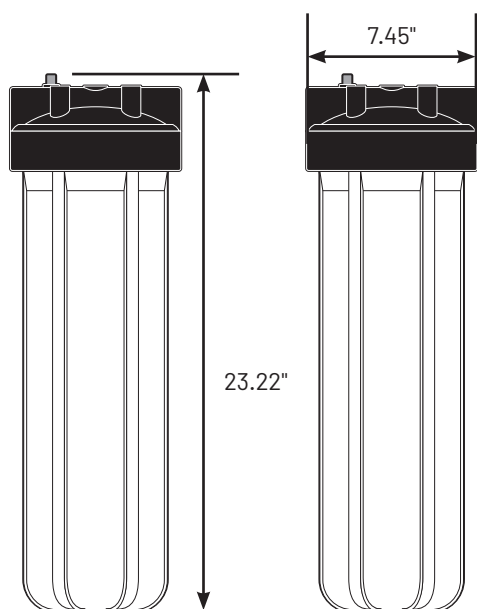

SPECIFICATIONS

- ◆ **System** (Model/Part No.)
PFAS Filtration System
FloPlus Protect 20BB/150736 (1/Case)
- ◆ **Housing Size**
20" Heavy duty
- ◆ **Inlet Size**
1" FPT
- ◆ **Housing Material**
Polypropylene
- ◆ **System Dimensions**
23.22" H x 7.45" W
(590 mm x 189 mm)
- ◆ **Cartridge Type**
Fibredyne Carbon Block
- ◆ **Contaminant Reduction**
PFOA, PFOS, PFHxS, PFNA,
PFHpA, and Chlorine**
- ◆ **Micron Rating**
1
- ◆ **Approximate Filter Life***
12 months
- ◆ **Capacity**
PFAS: 40,000 gallons (151,416 L)
Chlorine: See Chart Below
- ◆ **Flow Rate**
5 gpm (18.9 Lpm)
- ◆ **Certification**
NSF/ANSI Std. 53
- ◆ **Feed Pressure Range**
30 - 90 psi (2.06 - 6.20 bar)
- ◆ **Temperature Range**
40° - 100°F (4.4 - 37.8°C)
- ◆ **Replacement Cartridge**
(Model/Part No.)
FloPlus Protect 20BB / 655230-43
(6/Case)

FILTER PERFORMANCE SPECIFICATIONS

MODEL #	PART #	MICRON RATING	INITIAL ΔP (PSI) @ FLOW RATE (GPM)	*CHLORINE TASTE & ODOR REDUCTION (>90%) @ FLOW RATE (GPM) 2 PPM INFLUENT	PFAS REDUCTION @ FLOW RATE (GPM) 1,900 PPT INFLUENT
FloPlus Protect 20BB	655230-43	1	3 psi @ 5.0 gpm (0.21 bar @ 18.9 lpm)	215,000 gallons @ 5.0 gpm (813,775 L @ 18.9 lpm)	40,000 gallons @ 5.0 gpm (151,400 L @ 18.9 lpm)
			4.5 psi @ 7.0 gpm (0.31 bar @ 26.5 lpm)	170,000 gallons @ 7.0 gpm (643,450 L @ 26.5 lpm)	
			7 psi @ 10.0 gpm (0.48 bar @ 37.9 lpm)	80,000 gallons @ 10.0 gpm (302,800 L @ 37.9 lpm)	



The model FloPlus Protect 20BB is certified by IAPMO R&T against NSF/ANSI 53 for the reduction of claims specified on the Performance Data Sheet.

* Filter life dependent on gallon usage and overall incoming water quality.

**Based on internal testing

Chlorine reduction based on internal testing



Pentair Residential Filtration, LLC

13845 Bishops Dr. | Suite 200 | Brookfield, WI 53005 | United States

P: 262.238.4400 | Customer Service: 800.279.9404 | tech-support@pentair.com | pentair.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2026 Pentair. All Rights Reserved.

4006913 JL26